



Galco

Inspection Chambers

450MM INSPECTION CHAMBERS



Easy fit bungs



The unique blanking plates helps stop waste lying in the bottom of the unused inlet(s), helping to eliminate any unnecessary smells.

CLKS 453



The CLKS 453 comes with three bungs and three blanking plates.

Suitable for pipes of 110mm O/D.



CLKS 451

CLKS 455

CLKS 455

CLKS 455

CLKS 453




CLKS 455 Riser
300mm (rise height)
340mm(overall height)
The grooves on the riser enable easier cutting if needed.



CLKS 453 Base
Base height 300mm

One, two or three flows can be stopped by using the bungs and the blanking plates. The blanking plates reduce any waste being deposited in the unused inlet(s).

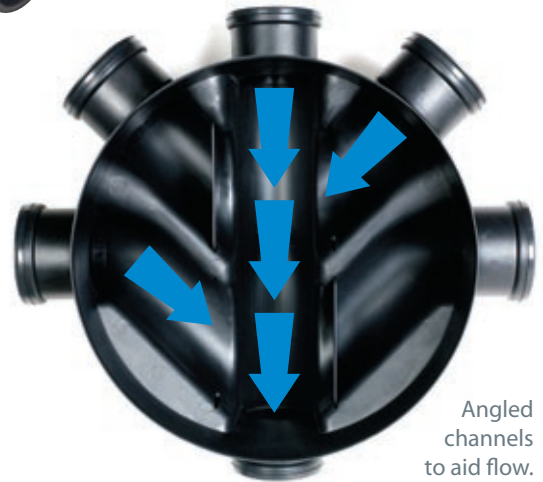


Angled channels to aid flow.

Advantages with CD453 & CD455 Chamber and Risers

- ▶ Deeper Base unit
- ▶ Greater flow access with outlets
- ▶ Blanking plates (3) – free of charge
- ▶ Free Seals with each Riser
- ▶ More robust design
- ▶ Range of Recessed/ Solid Top Access Covers tailor made to fit our chambers
- ▶ Unique CD499 Reducer (if access needs to be reduced to 350mm from 450mm). Simple, quick and less costly solution.

450MM INSPECTION CHAMBER RANGE

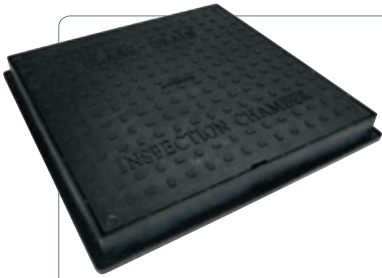

CLKS 451

- ▶ 450mm diameter clear opening
- ▶ Square solid top polypropylene cover and frame
- ▶ 35kN driveway loading
- ▶ Circular opening to suit all standard 450mm Inspection chambers
- ▶ Dual locking



CLKS 452

- ▶ 450mm diameter clear opening
- ▶ Circular solid top polypropylene cover and frame
- ▶ 35kN driveway loading
- ▶ Circular opening to suit all standard 450mm Inspection chambers
- ▶ Dual locking




C01657R

- ▶ 450mm diameter clear opening
- ▶ Circular solid top ductile iron cover and frame
- ▶ EN124-B125kN
- ▶ Circular opening to suit all standard 450mm Inspection chambers



CL 450SR

- ▶ 450mm diameter clear opening
- ▶ 80mm deep recessed top
- ▶ Block paver recessed cover and frame
- ▶ Integral lifting keys
- ▶ Circular opening to suit all standard 450mm Inspection chambers

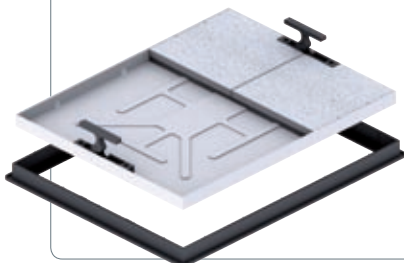

CL 450SR/450SRSL

- ▶ 450mm diameter clear opening
- ▶ 46mm deep recessed top
- ▶ Recessed sealed and locking internal tray type
- ▶ Integral lifting keys
- ▶ Circular opening to suit all standard 450mm Inspection chambers



CLKS 499

- ▶ Polypropylene Reducer ring
- ▶ To fit into above frames to reduce clear opening to 350mm, restricting access
- ▶ Conforming to Building Regulations for chambers over 1.2m needing restricted access



220MM-300MM INSPECTION CHAMBER RANGE



CLKS 300

- ▶ 220mm – 300mm diameter clear opening
- ▶ Square top polypropylene cover and frame
- ▶ 35kN driveway loading
- ▶ Polypropylene cover and frame
- ▶ Universal fitting circular opening to suit all standard shallow Inspection chambers
- ▶ Dual locking



CL 300SR

- ▶ 220mm – 300mm diameter clear opening
- ▶ 80mm deep recessed top
- ▶ Blocked pavior cover and frame
- ▶ Universal fitting circular opening to suit all standard shallow Inspection chambers



BOTTLE GULLIES




CD 460

- ▶ Side entry bottle gully

CD 461


- ▶ Back inlet bottle gully

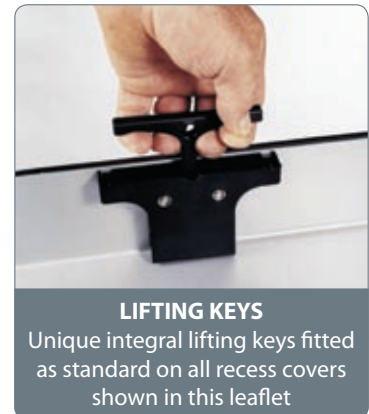

LIFTING KEYS

Unique integral lifting keys fitted as standard on all recess covers shown in this leaflet

POLYPROPYLENE DRAINAGE CHANNEL

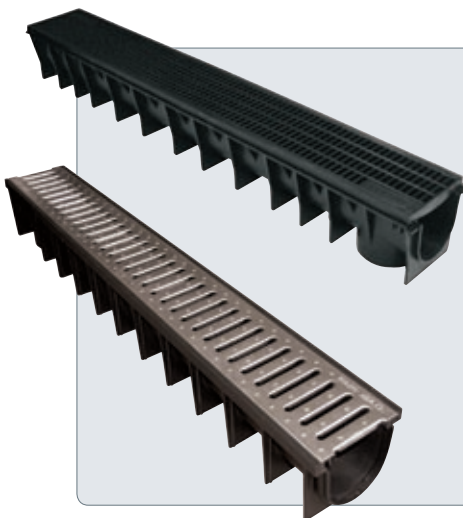

CLKS 422

- ▶ Polypropylene drainage channel
- ▶ c/w Polypropylene mesh grating
- ▶ Slide and snap locking channel

CLKS 425

- ▶ Polypropylene drainage channel
- ▶ c/w galvanized steel narrow slot grating
- ▶ Slide and snap locking channel

Also available



End caps **CLKS 402** Debris trap **CLKS 403**

